

MARINE

Toilets & Sanitation Systems



 Dometic

Sealand[®]

8800 DESIGNER SERIES

All-Ceramic MasterFlush™ Toilets and Bidets

SeaLand 8800 series electric macerating MasterFlush toilets and bidets offer home-like appearance and performance – with the convenience of electronic touchpad operation. All models feature a sparkling vitreous china finish and full-size residential-style seat. Available in white and bone colors, 12 and 24 VDC.

MODEL 8819 TOILET

- Ultimate comfort with standard-height, full-size seat
- Home-like water trap eliminates odors



MODEL 8811 BIDET

- Low-profile bidet only
- Complements model 8812 toilet



MODEL 8816 TOILET/BIDET

- Standard height macerator toilet
- Temperature-controlled bidet wash



MODEL 8818 TOILET

- Contemporary styling with standard seat height
- Home-like water trap eliminates odors
- Sloped back fits against hull








MODEL 8812 TOILET

- Low-profile style, small footprint for raised platforms
- Complements model 8811 bidet

Model	Description
8811	Low-profile macerator discharge bidet
8812	Low-profile, macerator discharge toilet
8816	Standard height, sloped back, macerator discharge toilet/bidet combination
8818	Standard height, sloped back, macerator discharge toilet
8819	Standard height, macerator discharge toilet
385880057	Macerator toilet Power/Tank Full panel kit, 12 VDC
385880058	Macerator toilet Power/Tank Full panel kit, 24 VDC

TOILET REQUIREMENTS


- Electrical:** Wiring – 12 ga. stranded copper (up to 20 ft./6.1 m from breaker).
Circuit – 12 VDC - 15-amp breaker; 24 VDC - 10-amp breaker (or in-line fuse).
- Water Supply:** Line/Fitting – 5-in. (13 mm) ID/5-in. MPT. Flow – 2.5 gpm (9.5 lpm) at toilet.
- Discharge:** 1.5-in. (38 mm) ID PVC pipe or sanitation hose connected to holding tank system.
Max. horizontal run – 98 ft. (30 m). Max. vertical run – 9.8 ft. (3.8 m).

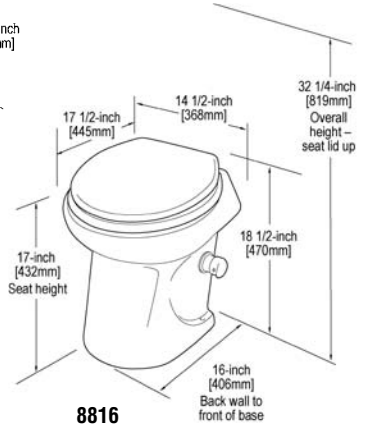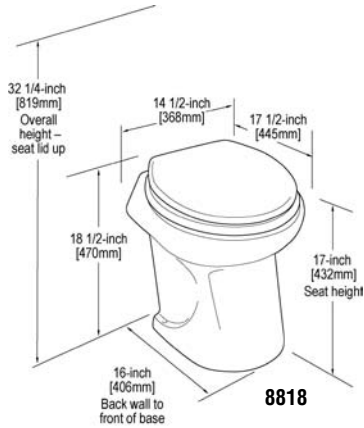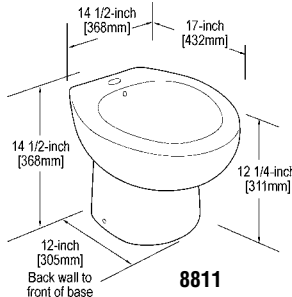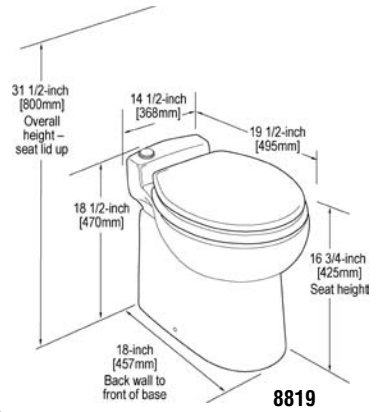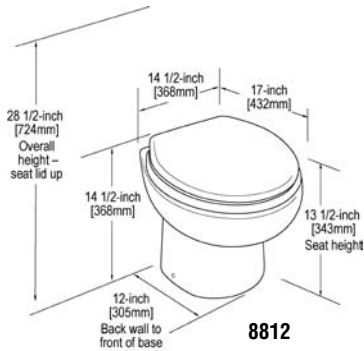

All dimensions may vary \pm 3/8" (10mm).


TOILET OPERATION TOUCHPAD

Three Settings – Low setting for liquid-only flush; Normal for standard flushing; Empty to clear water from bowl while underway.

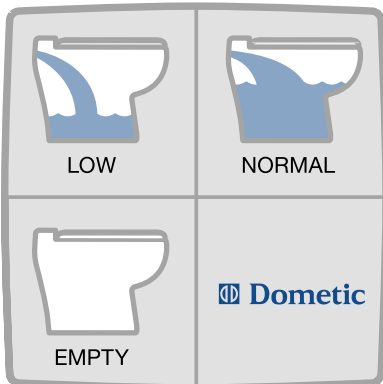

STATUS PANEL (OPTIONAL)

Indicates when toilet system electrical power is on, and when holding tank is full (toilet shut-down relay also available).

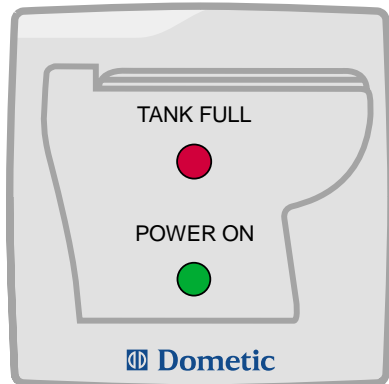

Call Dometic Sanitation for details.

700 SERIES

Convenient Toilet/Holding Tank Combination

Get a complete freshwater toilet system in one self-contained package. Using on-board water supply, this toilet system produces no foul odors associated with seawater systems. It's also a great replacement for recirculating toilets. Just connect water supply, discharge line and vent line – it's ready to go.


MODEL 711-M28

- 1 pint (.4 l) per flush
- 9.5-gallon (36 l) tank capacity
- Wooden seat for home-like comfort
- Integral vacuum breaker protects fresh water supply
- Foot pedal adds water to bowl and flushes toilet
- No electricity required
- High-strength polyethylene holding tank
- White and bone colors



711-M28

Model	Description
711-M28	Self-contained toilet/holding tank combination. Standard height, foot pedal flush

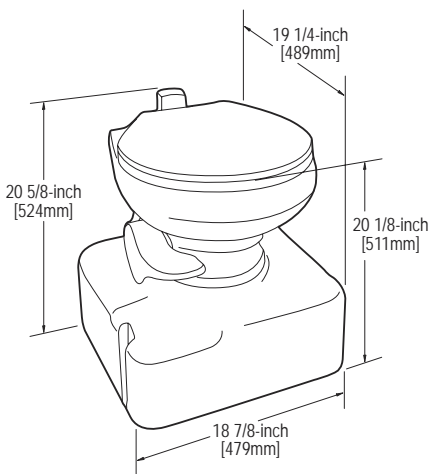

SYSTEM REQUIREMENTS

Water Supply: Line/Fitting – .5-in. (13 mm) ID/.5-in. MPT.
Flow – 2 gpm (7.6 lpm) at toilet.

Discharge: PVC fitting connects to 1.5-in. (38 mm) ID discharge plumbing.

Vent: 5/8-in. (16 mm) ID hose fitting.

500 AND 200 SERIES

Home-Comfort Toilets

Elongated seat and deep, household-size ceramic bowl offer premium user comfort for both gravity-discharge toilet models. Anti-splash rim keeps water in.


MODEL 510H

- 1 pint (.4 l) per flush
- Wooden seat
- Hand sprayer option available
- White and bone colors

Model	Description
510H	Standard height, through-the-floor discharge, foot pedal flush toilet
210	Standard height, through-the-floor discharge, foot pedal flush toilet



510H

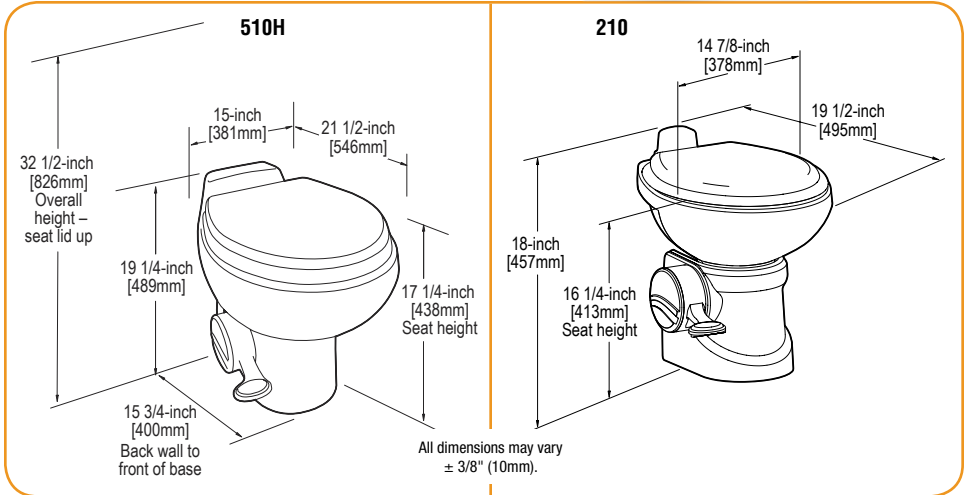

210

MODEL 210

- 1 pint (.4 l) per flush
- Plastic seat
- Hand sprayer option available
- White and bone colors

510H AND 210 TOILET REQUIREMENTS

Water Supply: Line/Fitting – .5-in. (13 mm) ID/.5-in. MPT.
Flow – 2 gpm (7.6 lpm) at toilet.

Discharge: 3-in. (76 mm) ID ABS or PVC pipe connected to holding tank.

970 SERIES

Portable Toilets

Powerful flushing at the touch of a button sets the new 970 portable toilet series apart from the rest. Requires no manual pumping or batteries, yet delivers a robust bowl-clearing flush every time. An easy-view level indicator lets you know when to empty the holding tank.

- 2.6-gallon (9.8 l) or 5.0-gallon (18.9 l) models
- High-strength ABS construction withstands demanding marine environment; smooth finish cleans easily for lasting beauty
- Full-size seat provides user comfort; latching lid stays secure while underway



972/974

- Prismatic level indicator shows remaining capacity in holding tank
- Splash-free tank design prevents splashing during flushes and discharges
- MSD models can be installed for direct overboard, dockside pump-out, or remote tank discharge
- Tan and gray colors



1. Pressurize water tank (every 4-5 flushes*).



2. Pull handle to flush into lower tank.



3. Push button to rinse bowl (or add water before use).





4. Extra-long spout and tank vent make emptying easy.

* Depending on amount of water used per flush.



975/976

Model	Description
972	2.6-gal. (9.8 l) capacity portable toilet
974	2.6-gal. (9.8 l) capacity portable toilet, mounting brackets
974MSD	2.6-gal. (9.8 l) capacity portable toilet, mounting brackets, MSD fitting
975	5.0-gal. (18.9 l) capacity portable toilet, mounting brackets
975MSD	5.0-gal. (18.9 l) capacity portable toilet, mounting brackets, MSD fitting
976	5.0-gal. (18.9 l) capacity portable toilet

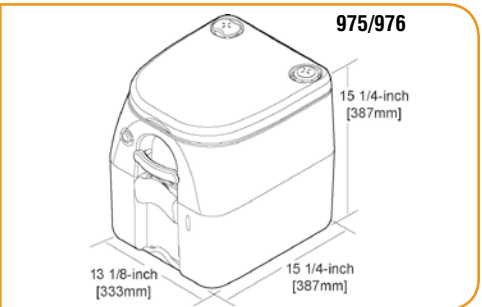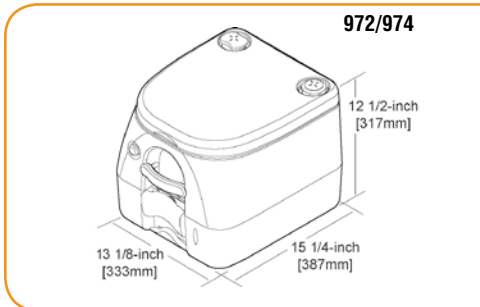

TOILET SPECIFICATIONS

Water Supply: Self-contained freshwater 2.3-gallon (8.7 l) upper tank.

Discharge: Standard models – discharge spout in bottom tank.

MSD models – PVC fitting connects to 1.5-in. (38 mm) ID discharge plumbing.

Vent: 5/8-in. (16 mm) ID hose fitting (MSD models only).

960 SERIES

Portable Toilets

Simple, self-contained toilet system offers the convenience of home anywhere you travel.

- 2.5-gallon (9.5 l) or 5.0-gallon (18.9 l) models offer enough capacity for 30-50 uses
- High-density polyethylene construction withstands demanding marine environment
- Scratch-resistant matte finish is easy to keep clean and looking good for years
- Comfortable and secure, the adult-size seat and firm-locking side latches assure user satisfaction
- MSD models can be installed for direct overboard, dockside pump-out, or remote tank discharge
- Parchment and platinum colors




962, 964




965, 966

Model	Description
962	2.5-gal. (9.5 l) capacity portable toilet
964	2.5-gal. (9.5 l) capacity portable toilet, mounting brackets
964MSD	2.5-gal. (9.5 l) capacity portable toilet, mounting brackets, MSD fittings
965	5.0-gal. (18.9 l) capacity portable toilet, mounting brackets
965MSD	5.0-gal. (18.9 l) capacity portable toilet, mounting brackets, MSD fittings
966	5.0-gal. (18.9 l) capacity portable toilet

962, 964

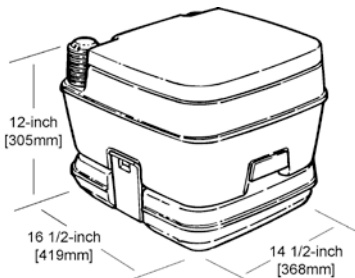

965, 966

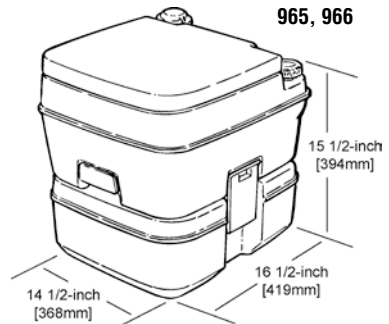

TOILET SPECIFICATIONS

Water Supply: Self-contained freshwater 2.6-gallon (9.8 l) upper tank.

Discharge: Standard models – discharge spout in bottom tank.

MSD models – PVC fitting connects to 1.5-in. (38 mm) ID discharge plumbing.

Vent: 5/8-in. (16 mm) ID hose fitting (MSD models only).

SEALAND PANELS, CONTROLS

“Power/Tank Full” Panel

- Integrates with MasterFlush™ system control module and any tank level monitoring system
- Indicates when MasterFlush system electrical power is on
- When “Full” indicator lights, electrical power to toilet is shut down to prevent overflowing of holding tank
- 2.5-in. (64 mm) x 1.625-in. (41 mm) panel size

Item	Description
313750012	Power/Tank Full panel, 12 VDC
313750024	Power/Tank Full panel, 24 VDC



“Do Not Flush” Panel

- Glowing red light warns against flushing due to full holding tank
- Connects to any tank level monitoring system
- 2.5-in. (64 mm) x 1.5-in. (38 mm) panel size

Item	Description
313318714	Do Not Flush panel, 12 VDC



TankWatch® 1 Alert System

- Highly reliable float switch activates red warning light when tank is full
- No electrical components contact water
- Easy to install on rigid tanks
- Operates on 12 VDC or 24 VDC
- 2.5-in. (64 mm) x 1.625-in. (41 mm) panel size

Item	Description
360000312	TankWatch 1 alert system



TankWatch 4 Level Monitor System

- The most flexible level indicator available
- Continuously monitors holding tank level. Micro float switches indicate empty, low, mid and full. International symbology for universal use
- Always one – and only one – light on. Eliminates confusion
- No false readings. No electrical components come in contact with waste or water. Operates on 12- or 24-volt DC
- Easy to install. Use on any size fresh, gray or black water tank. Available with either 22-inch or 45-inch adjustable probes
- Optional relay shuts down toilet when waste tank is full or shuts down water pump when freshwater tank is empty

Item	Description
360600113	Probe cap with vent, indicator panel, 22-in. probes
360600114	Probe cap, indicator panel, 22-in. probes
360600115	Probe cap with vent, indicator panel, 45-in. probes
360600116	Probe cap, indicator panel, 45-in. probes



SEALAND PANELS, CONTROLS

TankWatch® 6 and 9 Level Monitor Panels

- TankWatch 6 panel connects to standard freshwater and waste-water tank level indicators
- TankWatch 9 panel connects to standard freshwater, graywater and wastewater tank level indicators
- Both panels indicate Empty, Mid and Full tank levels
- Either panel must be used with TankWatch level indicators (Purchase TankWatch probe caps separately.)
- 4.75-in. (121 mm) x 2.875-in. (73 mm) panel size



Item	Description
313306012	TankWatch 6 six-light indicator panel
313309112	TankWatch 9 six-light indicator panel
313000345	TankWatch three-level probe cap with vent, 45-in. probes
313000346	TankWatch three-level probe cap, 45-in. probes
313000350	TankWatch three-level probe cap with vent, 22-in. probes
313000355	TankWatch three-level probe cap, 22-in. probes

TankMaster™ 4 Automatic Discharge Pump Control

- Diverts sewage directly overboard in unrestricted waters when holding tank reaches mid level and keyed control switch is set to “automatic” position
- Prevents accidental overboard discharge in restricted waters when control switch is turned to “off” position
- Simplifies plumbing by eliminating wye valves, seacocks and vented loops. Eliminates stagnating sewage trapped in hoses
- Includes control panel with keyed switch, discharge pump light and optional seacock light. For use with discharge pump, TankWatch 4 level monitor system and optional seacock interlock system



Item	Description	Item	Description
313814012	TankMaster 4, 12 VDC	313804012	TankMaster 4 with seacock light, 12 VDC
313814024	TankMaster 4, 24 VDC	313804024	TankMaster 4 with seacock light, 24 VDC

TankManager™ Discharge Pump Controller and Automatic Level Indicator

- Complete sanitation management system for offshore boats
- Monitors holding tank level
- Allows manual overboard discharge – pump turns off automatically
- Includes control panel and control module
- For use with SeaLand discharge pump and TankWatch® 4 system (sold separately)
- Optional model available for use with SeaLand seacock interlock relay
- 12 VDC and 24 VDC systems



Item	Description
313131012	TankManager, manual start, single head, 12 VDC
313131024	TankManager, manual start, single head, 24 VDC
313131112	TankManager, manual start, seacock light, single head, 12 VDC
313131124	TankManager, manual start, seacock light, single head, 24 VDC
313131212	TankManager, manual start, multiple head, 12 VDC
313131224	TankManager, manual start, multiple head, 24 VDC
313131312	TankManager, manual start, seacock light, multiple head, 12 VDC
313131324	TankManager, manual start, seacock light, multiple head, 24 VDC

SEALAND HTS SERIES

HTS-T and -Basic Models

A high-quality, odor-free holding tank system can be installed in virtually any boat with this wide selection of Sealand holding tank systems. Top-mounted discharge fittings prevent potential leaks, and all models feature many other performance advantages.



10 HTS-T



35 HTS-HL



28 HTS-HL



28 HTS-T

Model	Capacity (gal./ liters)	Empty Weight (lbs./kg)	Maximum Weight (lbs./kg)	Tank- Watch System	TankSaver Relief Valve	Outlets (qty.)	Discharge Pump	Vent Filter
Models including Discharge Pump (see dimensions on next page)								
10 HTS-T	10 / 38	18 / 8.2	98 / 40.9	included	included	2	included	–
28 HTS-T	27.5 / 104	40 / 18	260 / 118	included	included	2	included	included
40 HTS-T	40 / 151	44 / 20	364 / 165	included	included	2	included	included
Basic Models (see dimensions on pages 12, 13)								
12 HTS-VRT	11 / 42	20 / 9.1	108 / 49	–	included	2	–	–
12 HTS-HRZ	11 / 42	20 / 9.1	108 / 49	–	included	2	–	–
12 HTS-HL	12 / 45	22 / 10	118 / 53.5	–	included	2	–	–
15 HTS-VRT	15 / 57	25 / 11.3	145 / 65.8	–	included	2	–	–
15 HTS-HRZ	15 / 57	25 / 11.3	145 / 65.8	–	included	2	–	–
20 HTS-VRT	18 / 68	27 / 12.2	171 / 77.6	–	included	2	–	–
20 HTS-HRZ	18 / 68	27 / 12.2	171 / 77.6	–	included	2	–	–
25 HTS-HRZ	25 / 94	31 / 14.1	231 / 105	–	included	2	–	–
28 HTS-HL	28 / 106	37 / 16.8	261 / 118	–	included	2	–	–
30 HTS-HRZ	28 / 106	37 / 16.8	261 / 118	–	included	2	–	–
35 HTS-HL	35 / 132	38 / 17.2	318 / 144	–	included	2	–	–
40 HTS-HRZ	34 / 129	41 / 18.6	313 / 142	–	included	2	–	–
50 HTS-VRT-HL	50 / 189	53 / 24	453 / 205	–	included	2	–	–
50 HTS-HRZ-HL	50 / 189	53 / 24	453 / 205	–	included	2	–	–
55 HTS-HRZ	55 / 208	53 / 24	493 / 224	–	included	2	–	–
80 HTS-HRZ	80 / 302	54 / 24.5	694 / 315	–	included	2	–	–

Specifications subject to change without notice.


- Leak-proof, high-strength polyethylene holding tank
- 12 and 24 VDC models (HTS-T models)
- ISO/USCG compliant tanks
- Multiple discharge outlets eliminate extra plumbing connections
- Implosion-protected against high-powered dockside vacuum pumps
- HTS upgrades with other Dometic Sanitation products are easy

SEALAND HOLDING TANK SYSTEM REQUIREMENTS


Electric: Level indicator – 3 amps (12 VDC); 3 amps (24 VDC),
 Discharge pump† – 10 amps (12 VDC); 5 amps (24 VDC).
 † Requires separate circuit breaker.

Plumbing: Inlet fitting – 1.5-in. (38 mm) ID PVC pipe or sanitation hose from VacuFlush toilet.
 Discharge fittings – 1.5-in. (38 mm) ID PVC pipe or sanitation hose.
 Vent outlet – 5/8-in. (16 mm) ID


HTS-T MODEL DIMENSIONS

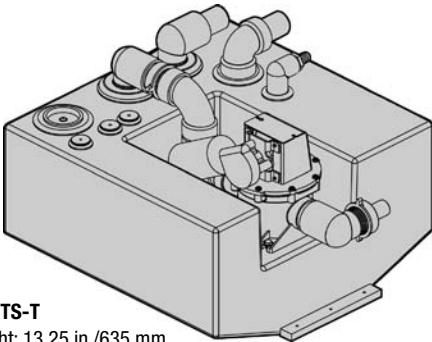

10 HTS-T
 Height: 13.25 in./635 mm
 Width: 19.5 in./495 mm
 Length: 23.375 in./594 mm

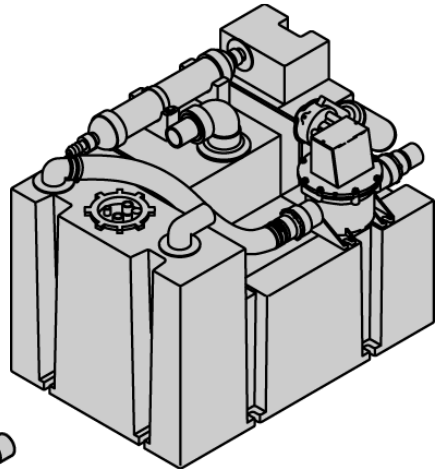


28 HTS-T
 Height: 19.5 in./495 mm
 Width: 19 in./483 mm
 Length: 30 in./762 mm

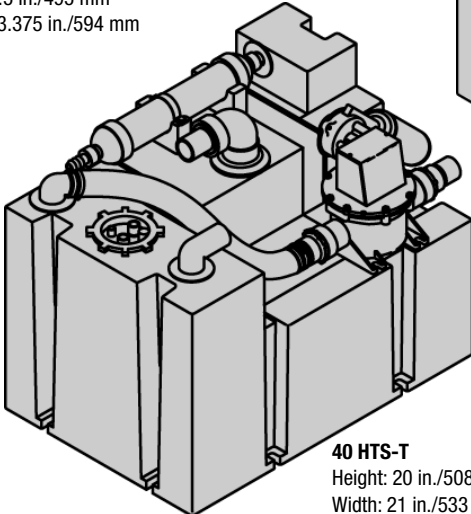


40 HTS-T
 Height: 20 in./508 mm
 Width: 21 in./533 mm
 Length: 35 in./889 mm


HTS-BASIC MODEL DIMENSIONS

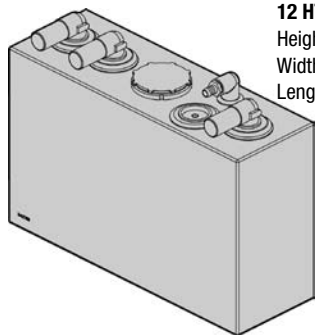


12 HTS-VRT
Height: 17.75 in./451 mm
Width: 8.25 in./210 mm
Length: 24.5 in./622 mm

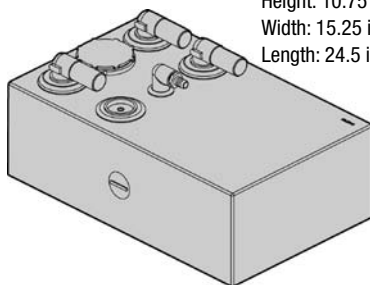


12 HTS-HRZ
Height: 10.75 in./273 mm
Width: 15.25 in./387 mm
Length: 24.5 in./622 mm

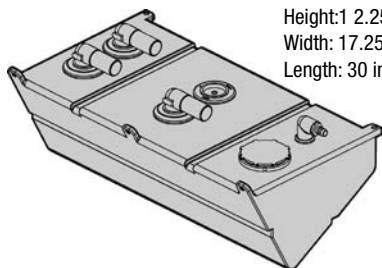


12 HTS-HL
Height: 12.25 in./311 mm
Width: 17.25 in./438 mm
Length: 30 in./762 mm

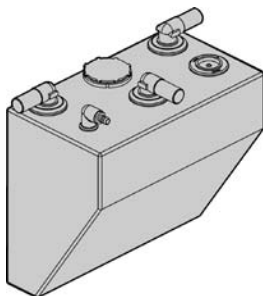


15 HTS-VRT
Height: 21.5 in./546 mm
Width: 12.5 in./318 mm
Length: 22 in./559 mm

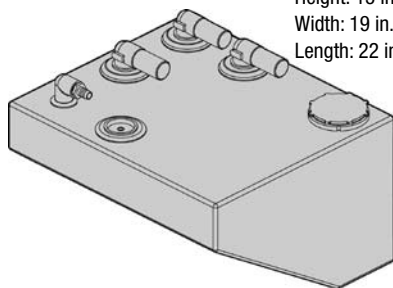


15 HTS-HRZ
Height: 15 in./381 mm
Width: 19 in./483 mm
Length: 22 in./559 mm

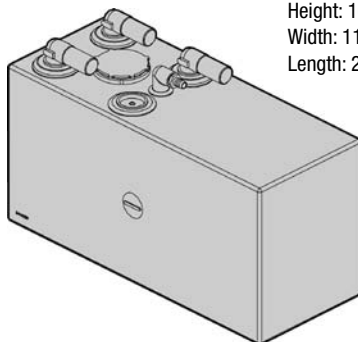

20 HTS-VRT
Height: 16.75 in./425 mm
Width: 11.5 in./292 mm
Length: 28.28 in./718 mm

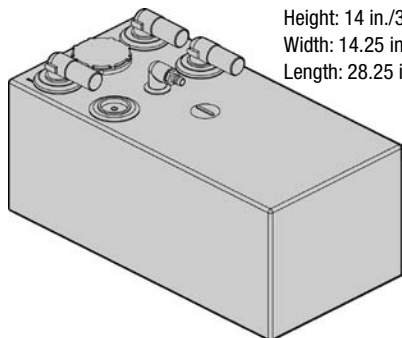


20 HTS-HRZ
Height: 14 in./356 mm
Width: 14.25 in./362 mm
Length: 28.25 in./718 mm

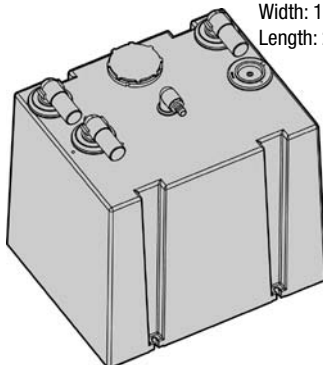


25 HTS-HRZ
Height: 20.5 in./521 mm
Width: 17 in./432 mm
Length: 21 in./533 mm

28 HTS-HL


Height: 14.25 in./362 mm
 Width: 23.5 in./597 mm
 Length: 35.25 in./895 mm

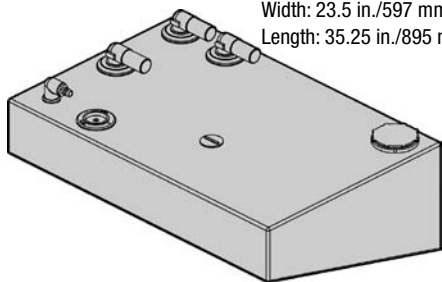**30 HTS-HRZ**


Height: 14.5 in./368 mm
 Width: 20 in./508 mm
 Length: 30 in./762 mm

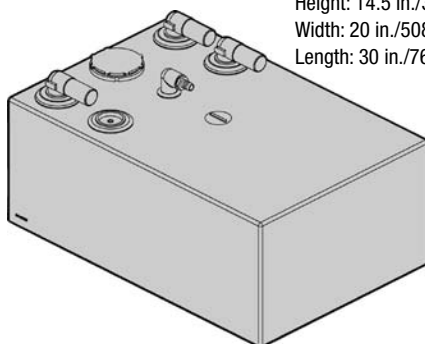**35 HTS-HL**


Height: 19.75 in./502 mm
 Width: 14 in./356 mm
 Length: 35 in./889 mm

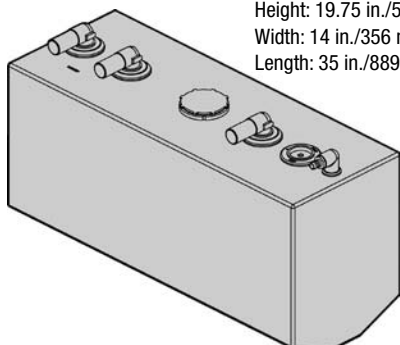**40 HTS-HRZ**


Height: 16 in./406 mm
 Width: 21.75 in./552 mm
 Length: 30 in./762 mm

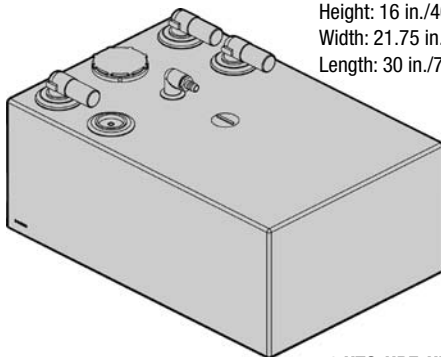**50 HTS-VRT-HL**


Height: 33.25 in./845 mm
 Width: 19 in./483 mm
 Length: 22 in./559 mm

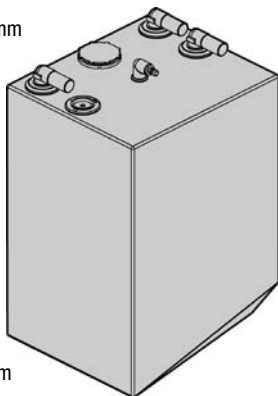**50 HTS-HRZ-HL**


Height: 21.375 in./543 mm
 Width: 22 in./559 mm
 Length: 30.75 in./781 mm

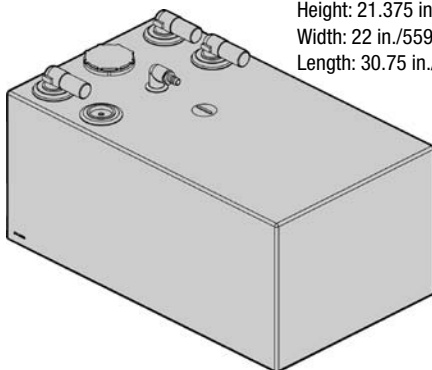**55 HTS-HRZ**

Height: 18.5 in./470 mm
 Width: 20 in./508 mm
 Length: 40 in./1016 mm

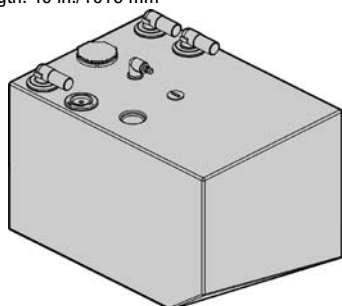**80 HTS-HRZ**

Height: 12.5 in./318 mm
 Width: 28 in./711 mm
 Length: 76 in./1930 mm

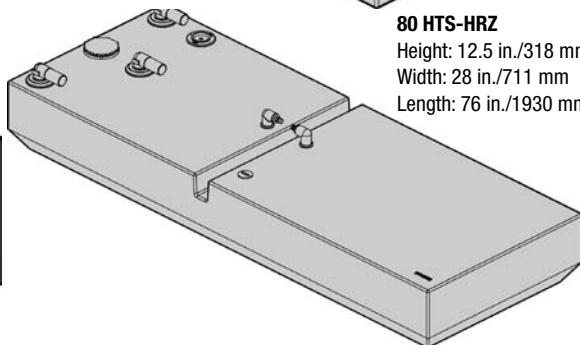

HOLDING TANK ACCESSORIES

Universal Level Indicator Kit

- Replaces individual TankWatch® probes
- Allows customized level indication for new installations
- Two probe lengths adjust to different holding tank sizes or desired indication levels
- Integrates with any TankWatch system

Item	Description
385311253	Universal level indicator kit, 12-inch (305 mm)
385311254	Universal level indicator kit, 24-inch (610 mm)



Universal Holding Tank Flange Kit

- Allows installation of TankWatch probe cap into existing holding tanks
- Includes 3-in. (76 mm) inspection port, gasket and stainless steel hardware

Item	Description
307230272	Universal flange kit



Universal Holding Tank Clean-out Kit

- Provides easy access to holding tank interior
- Easy to install on any rigid tank
- Includes 3-in. (76 mm) inspection port and cap, O-ring, gasket and stainless steel hardware

Item	Description
307348685	Holding tank clean-out kit



TankSaver® Relief Valve

- Protects holding tank from excessive suction by dockside pumps
- Easy to install – no sealant or spinweld required
- Fits tanks up to 30 in. (762 mm) deep
- Easy to install

Item	Description
313255247	TankSaver relief valve



Holding Tank Diptube Kit

- Removes waste through top of tank – eliminates stagnant waste from sitting in discharge line
- Prevents clogging and reduces tank residual
- Fits tanks up to 30 in. (762 mm) deep
- Easy to install


Item	Description
307348685	Holding tank clean-out kit



ACCESSORIES

T-Series Discharge Pump

- Runs dry without harm
- Patented bellows pump can run dry without damage
- Draws only 6 amps at 12-volt DC
- Self-priming up to 10 feet (3.3 meters) of water
- Handles up to 300 gallons (1136 liters) per hour

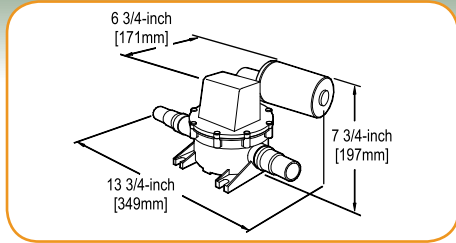

Item	Description
360301200	T series discharge pump, 12 VDC
360302400	T series discharge pump, 24 VDC

NozAll™ Pumpout Adapter

- Provides airtight seal between rubber-nozzle type and cam-operated type pumpout station nozzles and most boat deck discharge fittings
- Cleaner pumpouts – eliminates need for messy water source to create sufficient vacuum
- Easy to install – three thread sizes accommodate most deck fittings



Item	Description
310343502	11.5 tpi (4.5 tpcm), 1-7/8 in. (48 mm) OD
310343503	11.5 tpi (4.5 tpcm), 1-5/8 in. (41 mm) OD
310343504	16 tpi (6.3 tpcm), 1-5/8 in. (41 mm) OD



SaniGard™ Holding Tank Vent Filter

- Stops odors that escape from the holding tank vent
- Contains odor-removing filter materials to keep boat smelling clean and pleasant
- Each cartridge lasts for an entire season and is easily replaced for a fresh start
- Vent filter includes mounting brackets and hose adapters

Item	Description
309310002	5/8 in. (16 mm) vent filter, bracket
309310007	3/4 in. (19 mm) vent filter, bracket
309310005	1 in. (25 mm) vent filter, bracket
309310003	1-1/2 in. (38 mm) vent filter, bracket

PLUMBING HOSE AND VALVES

SeaLand OdorSafe® Plus Sanitation Hose

- Best odor barrier of any marine hose available
- Five-year limited warranty
- Up to 500% greater resistance to odor permeation than the so-called “no-odor” marine hoses!
- Available in 1-1/2-inch (38 mm) for waste line. Sold in 50 ft. (15.2 m) coils



Item	Description
306342871	1-1/2 in. (38 mm) ID x 50 ft. (15.2 m) OdorSafe Plus hose


SeaLand MaxFlex Sanitation Hose

- Very flexible, high-quality hose for multiple sanitation system uses.




Item	Description
306341116	1-1/2 in. (38 mm) ID x 50 ft. (15.2 m) MaxFlex hose
306341145	1 in. (25 mm) ID x 50 ft. (15.2 m) MaxFlex hose
306341628	3/4 in. (19 mm) ID x 50 ft. (15.2 m) MaxFlex hose
306342590	3/4 in. (19 mm) ID x 100 ft. (30.4 m) MaxFlex hose
306345650	5/8 in. (16 mm) ID x 50 ft. (15.2 m) MaxFlex hose
306345688	5/8 in. (16 mm) ID x 100 ft. (30.4 m) MaxFlex hose

Ball Valve and In-Line Check Valves




CHECK VALVE

- For light duty applications
- For use with SeaLand's OdorSafe Plus 1-1/2" (38 mm) sanitation hose



IN-LINE CHECK VALVE

- For heavy use installations
- Check valve can be replaced without removing hoses
- For use with SeaLand's OdorSafe Plus 1-1/2" (38 mm) sanitation hose



BALL VALVE

- Non-corroding PVC
- Teflon seals
- For use with SeaLand's OdorSafe Plus 1-1/2" (38 mm) sanitation hose

Item	Description
308238696	1-1/2 inch (38 mm) plastic check valve
308300011	1-1/2 inch (38 mm) in-line check valve
308346087	1-1/2 inch (38 mm) ball valve


HOSE FITTINGS

All fittings are designed to be used with SeaLand's OdorSafe Plus 1-1/2" (38 mm) Sanitation Hose. Kits include Custom Hose Adapters.




HOSE MENDER KIT

- Connects 1-1/2" (38 mm) hose for repair or maintenance purposes
- Includes 2 Custom Hose Adapters




90° BEND KIT

- Provides smooth sweep bend—eliminates hose kinks
- Fits 1-1/2" (38 mm) hose
- Includes 2 Custom Hose Adapters




HOSE ADAPTER KIT

- Connects 1-1/2" (38 mm) hose to 1-1/2" (38 mm) FPT fitting
- Includes 1 Custom Hose Adapter




DOUBLE BEND KIT

- Connects intersecting 1-1/2" (38 mm) hose segments per indicated flow
- Includes 3 Custom Hose Adapters



WYE KIT

- Connects intersecting 1-1/2" (38 mm) hose segments per indicated flow
- Includes 3 Custom Hose Adapters



TEE KIT

- Connects intersecting 1-1/2" (38 mm) hose segments per indicated flow
- Includes 3 Custom Hose Adapters



PVC 45° STREET ELL

- Adapts to all 1-1/2" (38 mm) PVC fittings shown here




REDUCING ADAPTER

- Connects 1-1/2" (38 mm) hose to 1" (25 mm) hose




PVC 90° STREET ELL

- For tight bends
- Can be used with other PVC fittings shown
- 1-1/2" (38 mm) Hub




PVC ADAPTER

- Connects hose with custom hose adapter or rigid PVC pipe to 1-1/2" (38 mm) FPT fitting




CUSTOM HOSE ADAPTER

- Can be used with all 1-1/2" (38 mm) PVC fittings with socket connection
- Lubricated hose or cuff slides on easily



FLEXIBLE VINYL COUPLING

- Handy 3" (76 mm) length of soft vinyl to couple 1-1/2" (38 mm) hose adapter fittings



PLASTIC VENT FITTING

- Through-hull fitting for 5/8" (16 mm) ID vent hose

Item	Description
307230310	Hose mender kit
307230311	90° bend kit
307230312	Hose adapter kit
307230313	Double bend kit
307238798	Wye kit
307238802	Tee kit
307341104	PVC 45° street ell
307341113	Reducing adapter
307341161	PVC 90° street ell
307341425	PVC adapter
307341513	Custom hose adapter
307348684	Flexible vinyl coupling
307346368	Plastic vent fitting

CONVENIENCE PRODUCTS

SeaLand® Rapid-dissolving Tissue

- Single-ply tissue provides same comfort as home
- 25% more sheets than other brands
- Biodegradable – contains no dyes or perfumes
- 400 sheets per roll



SeaLand® ULTRA Toilet Tissue

- Soft two-ply comfort in a rapid-dissolving tissue
- Zipper-seal bag keeps tissue dry
- Breaks up quickly to prevent clogs. Biodegradable
- 500 big sheets per roll



Item	Description
379441204	1-ply toilet tissue. 4 rolls, 400 sheets per roll
379441205	2-ply toilet tissue. 4 rolls, 500 sheets per roll

Dometic® and SeaLand® Holding Tank Deodorants

- Improved liquid deodorant formula lasts three times longer than other national brands in preventing odor
- Powerful action breaks down waste and keeps holding tanks clean
- Floral-mint fragrance works immediately
- 8 oz. liquid or 2 oz. granulated formula treats a 40-gallon (151-liter) holding tank

Item	Description
379626002	Six 2-oz. packets granulated holding tank deodorant
379224008	Two 8-oz. bottles liquid holding tank deodorant
379264008	Six 8-oz. bottles liquid holding tank deodorant
379214016	16-oz. bottle liquid holding tank deodorant
379214032	32-oz. bottle liquid holding tank deodorant
379214128	1-gallon bottle liquid holding tank deodorant



SeaLand® Clean 'n Green Cleaner and Deodorant

- Cleans any marine or RV toilet and controls tank odors with one treatment
- Rapid-dissolving 2-oz. packet effervesces in water, leaving bowl sparkling clean
- Won't harm plastic bowls or rubber seals
- Non-toxic, non-staining formula contains 100% biodegradable granules
- Enzymes break down waste and tissue for thorough tank discharge
- One packet treats a 40-gallon (151 l) tank



Item	Description
379506602	Six 2-oz. Clean 'n Green deodorant packets, plastic jar
379512602	Twelve 2-oz. Clean 'n Green deodorant packets, foil pouch

SeaLand® Environment-Friendly Tank Cleaner and Deodorant

- Effective odor control with only 4 oz. of deodorant in a 20-gallon tank
- Environmentally friendly formula controls odors without formaldehyde, glutaraldehyde, quaternary salts or other harsh chemicals
- Cleans tanks – breaks down waste and tissue
- Pleasant, fresh scent



Item	Description
379124008	Two 8-oz. bottles environment-friendly liquid holding tank deodorant
379114032	32-oz. bottle environment-friendly liquid holding tank deodorant
379114128	1-gallon bottle environment-friendly liquid holding tank deodorant

SeaLand® Toilet Bowl Cleaner

- Powerful cleaning action removes tough stains and grime in two minutes!
- Dissolves mineral deposits that can build up between flush ball and rubber seal on marine and RV toilets
- Non-toxic, biodegradable ingredients are environmentally safe
- Thick formula stays under rim; requires 20% less than other cleaners



Item	Description
379314016	16-oz. bottle liquid bowl cleaner

SeaLand® SanX®/TDX Treatment Chemical

- Specially formulated for SeaLand SanX and Mansfield TDX treatment systems
- Each gallon handles four treatment cycles
- Biodegradable

Item	Description
373348666	1-gallon SanX/TDX treatment chemical







TOILET COLORS

Dometic marine toilet color options complement a wide range of boat color schemes.



Permanent	White	Bone
8800	◆	◆
700	◆	◆
500	◆	◆
200	◆	◆



Portable	Tan	Gray	Parchment	Platinum
970	◆	◆		
960			◆	◆

Dometic Corporation is a customer-driven, world-leading provider of innovative leisure products for the caravan, motorhome and marine markets. Dometic offers a complete range of air conditioners, refrigerators, awnings, cookers, sanitation systems, lighting, windows, doors and other equipment that makes leisure life more comfortable away from home.

Dometic also provides refrigerators for specific use in hotel rooms, offices and for storage of medical products and wine. Dometic's products are sold in almost 100 countries and are produced mainly in Dometic's own production facilities around the world. Dometic has more than 4,400 employees.

Dometic Sanitation Corporation

13128 State Rt 226

PO Box 38

Big Prairie OH 44611-0038

330-496-3211 • Fax 330-496-3097

SeaLand Product Hotline • 1-800-321-9886

www.DometicSanitation.com

340286 11/06



Dometic

SeaLand®