

SCOT

Bronze Marine Motorpump™

1 1/4 x 1 NPT 2 Pole 3450-2900 RPM 60-50 Hz

35067

JANUARY 16, 2014

- **Compact**
- **Enclosed Switch Compartment**

Pump

- All Bronze marine centrifugal pump
Freshwater or seawater applications
- Precision machined to close tolerances for consistent performance.
- Hardware - Type 303 stainless steel
- Semi-open impeller handles solids
- Impeller mounted on motor shaft
- Heavy-duty, designed for continuous 24 hour – 7 day operation.

Shaft Seal

- Rated at 75 PSI – 5 BAR
- Seawater Buna rubber parts, ceramic stationary and carbon rotating element, stainless steel spring and metal components

Motor

- Meets Coast Guard ignition protected requirements. The capacitor and starting switch are in the enclosed outlet cover.
- Sealed ball bearings
- Designed for dual frequency 60 Hz or 50 Hz. Connect to either 60 Hz or 50 Hz power.
- Single-phase capacitor start
60 Hz – 115/230 Volt
50 Hz - 110/220 Volt
- Three phase motors are not available
- Stainless steel shaft


To Select a Motorpump

- Establish the capacity (GPM) and head required
- Refer to the 50 Hz or 60 Hz curve to determine the impeller required



35067

[Click Here to View SN-35000 Group page for general specifications and order information](#)

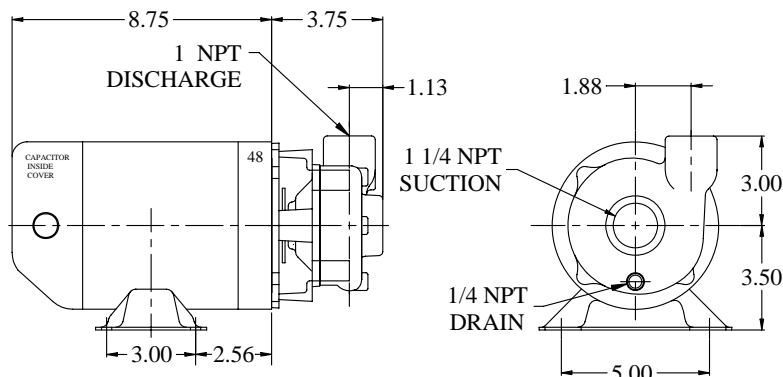

Suggested Parts Inventory

Item	Description
Seal Kit 189.001.116	One seal and install instructions One O-Ring case gasket
Impeller 131.000.689.XXX	XXX is the impeller diameter e.g. 250, 300, or 344
Motor Bearings 6203	6203 is an industry standard number

Motorpump 35067

Motor HP		Wt. lbs.	Amperes	
60 Hz	50 Hz		60 Hz 230 V	50 Hz 220 V
1/3	1/3	29	3.5	3.9

Amps for 115 V 60 Hz is double 230 V amps

