

SCOT Bronze Marine Motorpump™

Group
35000
MAY 7, 2014


New Models have the same dimensions, performance, and parts as Former Models

Former Model No.	New Model No.	Case		60 Hz 3450 RPM Max Max Head		50 Hz 2900 RPM Max Head	Max HP	Std Motor Encl	3 ph avail
		Suct	Disch	GPM	feet	meter			
66	35066	1	3/4	30	47	10	1/3	ODP	No
67	35067	1-1/4	1	35	49	10	1/3	ODP	No
68	35068	1-1/4	1	35	49	10	1/3	TEFC	No
69	35069	1	3/4	30	49	10	1/3	TEFC	No
64	35064	1-1/4	1-1/4	60	49	10	3/4	TEFC	Yes
65	35065	1-1/4	1	60	49	10	3/4	TEFC	Yes
70	35070	1-1/2	1-1/2	80	40	8	3/4	TEFC	Yes

Spec pages provide detailed information on pump capacity and dimensions.

Equivalent Pumps

Oberdorfer Model	Scot Model
104	35066
109	35065

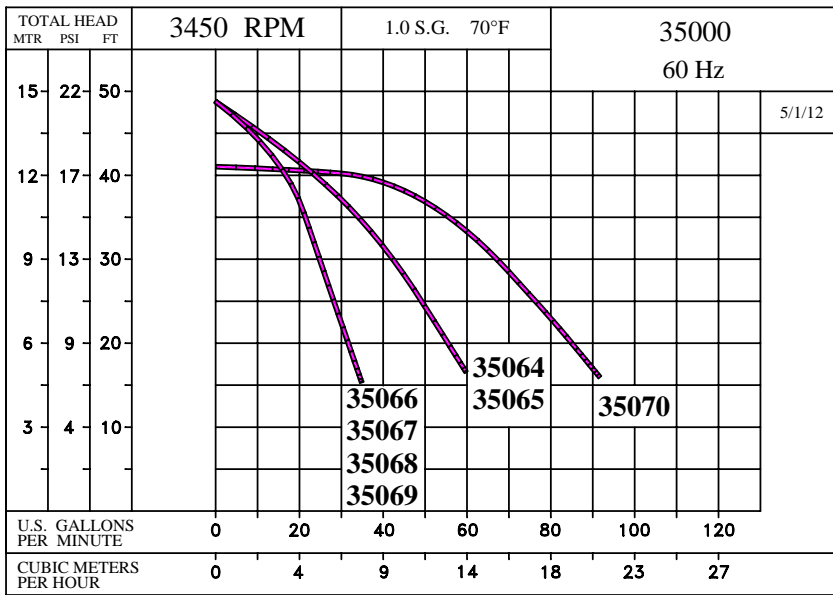

Curves show capacity and head for maximum HP of each pump model

Pump

- All Bronze marine centrifugal pump
Freshwater or seawater applications
- The case, adapter, and impeller are cast from a nickel enhanced Navy alloy bronze.
- Hardware – Type 303 stainless steel
- Semi-open impeller handles solids
- Heavy-duty, designed for continuous 24 hour – 7 day operation

Shaft Seal

- Rated at 125 PSI – 8 BAR
- Seawater Buna rubber parts, ceramic stationary and carbon rotating element, seawater stainless steel spring and metal components.
- One Seal Kit fits all 35000 models
Includes seal and O-ring case gasket

Motor – ODP – Models 66 and 67

- Meets Coast Guard ignition protected requirements.
- The capacitor and starting switch are in the enclosed outlet cover.

To Order a Motorpump Specify

- Model Number
- Capacity (GPM) and head
- Impeller (Imp) number
- Motor HP • Hz (60 or 50)
- Voltage
- Single phase or three phase

